

XL-9600

2D Wireless Barcode Scanner




Features

- 1 Buttons support 2 million tests
- 2 Support update online, fast after-sales service
- 3 Storage function, 40,000 EAN-13 barcode support
- 4 Cable Anti - interference design, ensure data transmission
- 5 Super decoding ability, good at reading colored, stained and fuzzy code



Parts Instruction

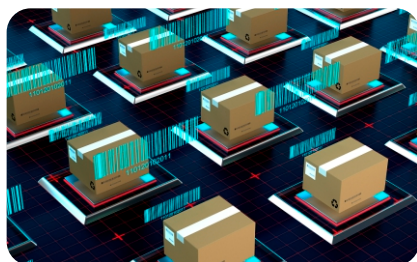

Logistics Distribution



Warehouse

SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.

Office Add: 4F, No.7, Kehui First Street, Science Road, Guangzhou, China
Tel: +86-20-32053765 Fax: +86-20-82115390
Site: www.xl-scan.com
E-mail: sales@xl-scan.com



XL-9600 Technical Parameters

Performance Parameters	
Scan Technology	2D Imager
Image sensor	CMOS
light source	RED LED 610-650nm
CPU	32bit ARM
COMS resolution	640x480 Pixels
Exposure	Global Shutter
Scanning speed	60 fps
Minumum resolution	≥3mil
Decoding depth of field	60-360mm (13mil PCS90%)
Scanning angle	rotate 360°, inclination 65°, elevation 60°
System supported	Android/Windows/Linux/IOS
Scan mode	Manual trigger & Automatic induction
Decoding capability	1D: Codabar, Code11, Code39, Code32, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Code93, Code128, GS1-128, UPC-A, UPC-E, EAN 8, EAN 13, GS1 DataBar (RSS14), GS1 DataBar Limited, GS1 DataBar Expanded, etc 2D: PDF417, Micro PDF417, QR Code, Micro QR, Data Matrix, Aztec Code
Physical Parameters	
Size	Scanner: L*W*H= 163*68*80(mm) Charging base: L*W*H=15*6*19(mm)
Weight	Scanner: 175g
Interface	USB
Charging way	Micro USB cable charging
Charging time	4.5H
Standby time	6 months(Dormant state)
Continuous battery life	16H
Battery	Replaceable & Rechargeable lithium battery, 2200mAh
Receiver interface	USB
Material	ABS+TPU
Input voltage	DC 5V
Working current	250mah
Stand-by current	<1uA
Indicator	LED indicator light, buzzer
Interface	USB / USB-VCP
Other Parameters	
Communication methods	2.4G wireless communication, Bluetooth wireless communication
Communication distance	2.4G mode: 100M (open space) Bluetooth mode: 10M (open space)
IP Standard	IP54
Drop Resistance	1.5m
Temperature (Operating)	-0°C~50°C
Humidity (Operating)	Relative humidity 5%~95%(no condensation)
Temperature (Storage)	-40°C~70°C
Light source	0~5000Lux(fluorescent), 0~100,000Lux(Sunlight)

SUNLUX IOT TECHNOLOGY (GUANGDONG) INC.

Office Add: 4F, No.7, Kehui First Street, Science Road, Guangzhou, China
 Tel: +86-20-32053765 Fax: +86-20-82115390
 Site: www.xl-scan.com
 E-mail: sales@xl-scan.com

